

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 April 2001 (12.04.2001)

PCT

(10) International Publication Number
WO 01/24987 A1

(51) International Patent Classification⁷: **B29C 33/48**,
33/22 // B29L 30:00

(21) International Application Number: PCT/US99/22799

(22) International Filing Date: 1 October 1999 (01.10.1999)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **THE GOODYEAR TIRE & RUBBER COMPANY** [US/US];
1144 East Market Street, Akron, OH 44316-0001 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LONEY, Gregory, Lee** [US/US]; 2222 Stone Creek Trail, Cuyahoga Falls, OH 44223 (US). **ROBEK, David, Chester** [US/US]; 953 Elizabeth Court, Cuyahoga Falls, OH 44223 (US).

(74) Agent: **LACHER, Frederick, K.**; c/o Robert W. Brown, Patent Counsel, The Goodyear Tire & Rubber Company, 1144 East Market Street, Akron, OH 44316-0001 (US).

(81) Designated States (*national*): AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEGMENTED TIRE MOLD

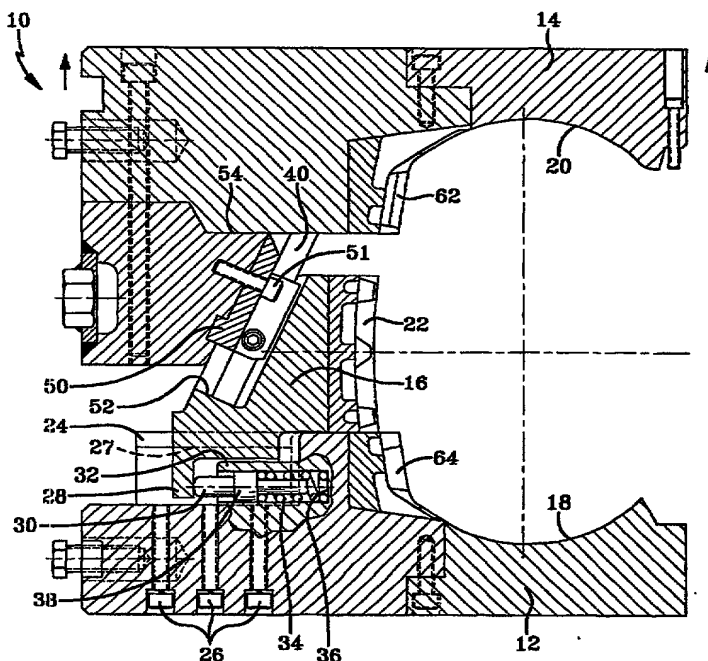

(57) Abstract: A segmented tire mold having radially movable circumferentially spaced sliding center segments activated by sliding connections between an upper mold half and the segments in response to opening and closing of the mold.

WO 01/24987 A1